


Hik-connect 手機 APP 非綁定帳號設定

- 開始動作之前請先確認主機是否完成網路連線
- 主機端開啟 Hik-connect 平台連接

主選單 → 設定 → 網路參數 → 平台連接




- 紅框部分“打勾”

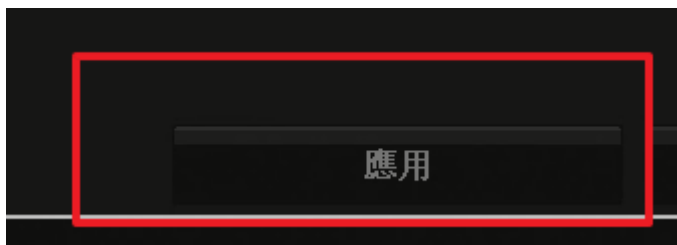


- “打勾”後按應用

手機設定 Hik-connect APP

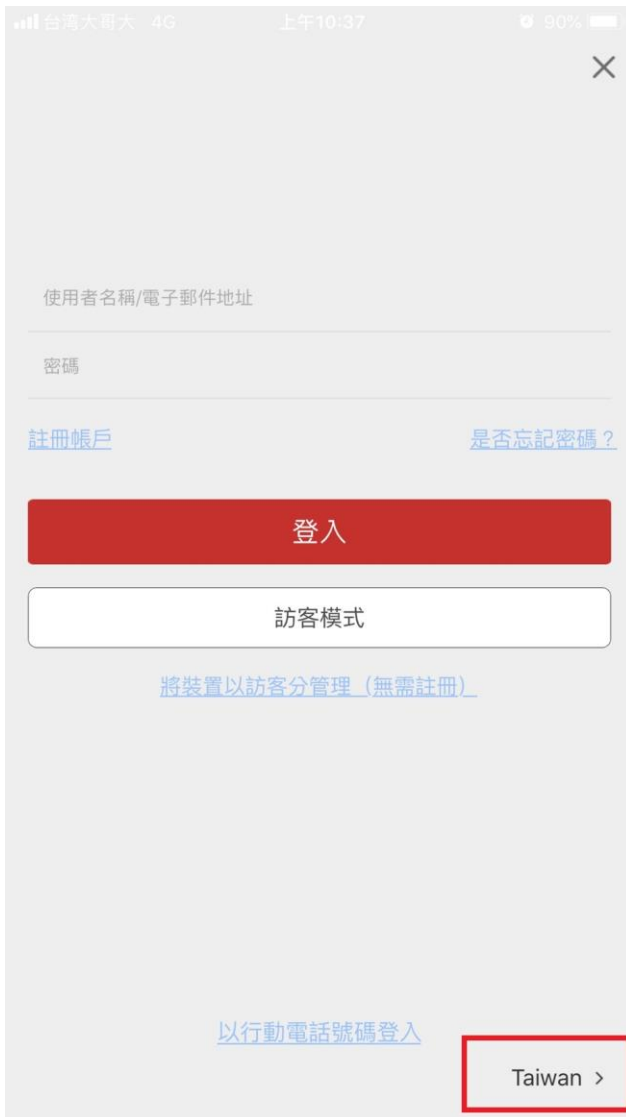

● 右下角地區選擇 Taiwan

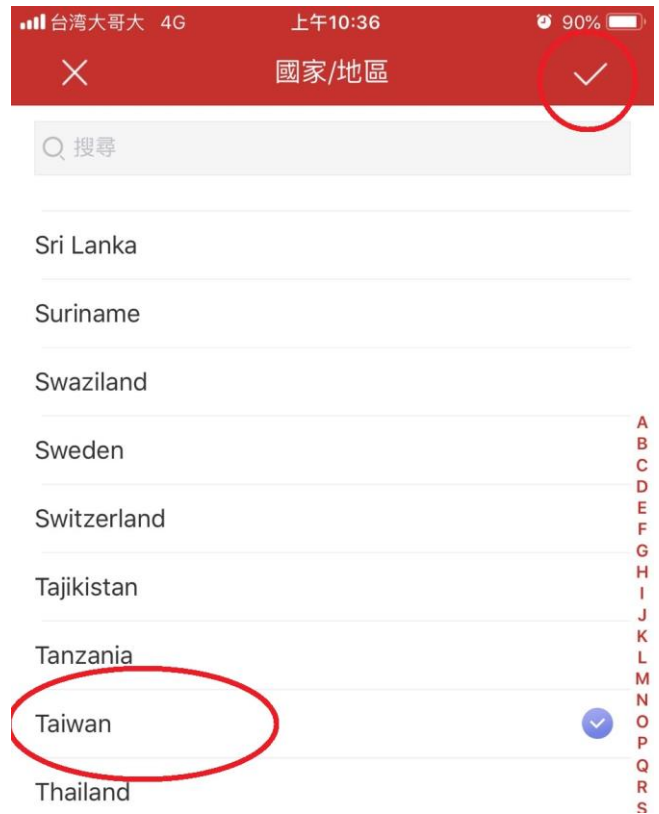

選擇完成記得右上角”打勾”

- 選擇”訪客模式” 進入

使用者名稱/電子郵件地址

密碼

[註冊帳戶](#) [是否忘記密碼?](#)

登入

訪客模式

[將裝置以訪客分管理 \(無需註冊\)](#)

- 右上角”+” 選擇”掃描 QR Code”




- 請掃描”平台連結” 頁面中的 QR Code



- 請瞄準方塊四角



- 掃描完成後即可出現此畫面 → 按下“新增”

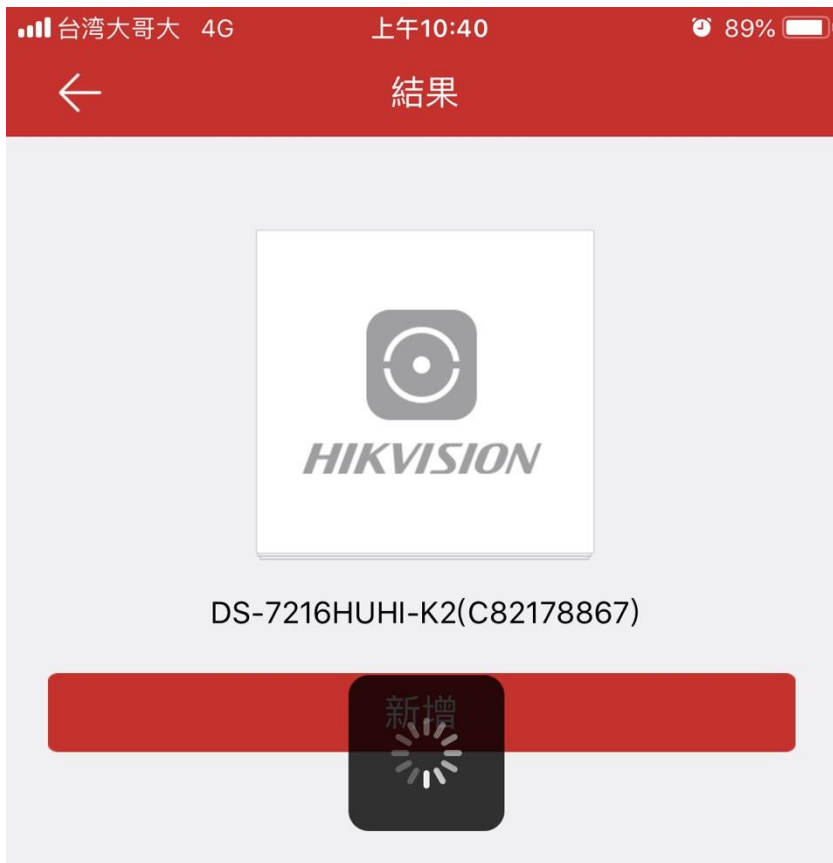

- 新增完成後 → 完成

台灣大哥大 4G

上午10:40

89%



[設定 DDNS](#) (?)

完成

- 主機別名可依個人喜好 → 輸入完成後按下“儲存”



- 新增完成後即可至”我的裝置”看見設備



● 點一下設備，畫面隨即出現在右下角小方格

The screenshot displays a mobile application interface for managing Hikvision devices. On the left, there is a vertical list of device entries, each with an icon and a label: '新設備 28', '新設備 29', '新設備 30', '新設備 31', '新設備 32', '新設備 33', and 'DS-7216HUHI-K2(C)'. The 'DS-7216HUHI-K2(C)' entry is highlighted with a yellow background. To the right of this list is a 4x4 grid of video thumbnails. Each thumbnail shows a red circle with 'NO VIDEO' and '0%' below it, indicating that no video is being received from these devices. A grey 'X' icon is visible in the top right corner of the grid area. At the bottom of the screen is a navigation bar with three items: 'Hik-Connect' with a red camera icon, '訊息' with an envelope icon, and '更多' with three dots.