


PS-20834

## 八埠超高速光纖網路交換器

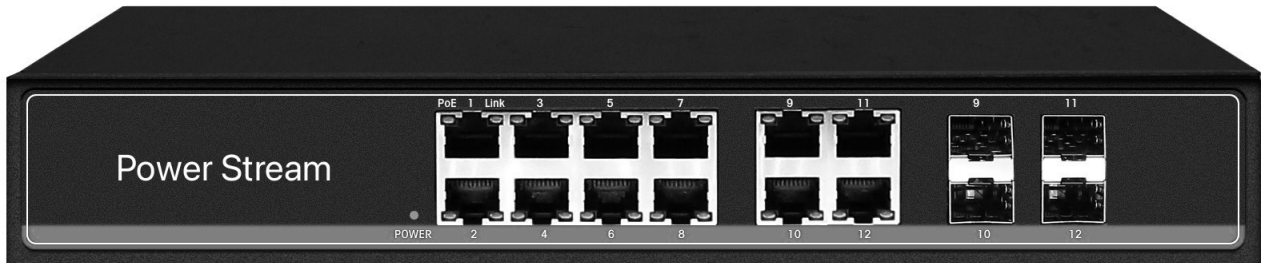

固定端口	8 個 10/100/1000M POE PORT
	4 組 100/1000 PORT RJ45 或 4 組千兆 SFP
POE 選購	支援 802.3 af/at 超長距離自動偵測支援到 260 米傳輸
POE 電源	150W
雙絞線特性	10BASE-T : Cat3,4,5 UTP(≤ 250 meter) 100BASE-TX : Cat5 or later UTP(150 meter) 1000BASE-TX : Cat6 or later UTP(150 meter) SFP: 1000M single and multimode optical module with maximum distance ≤ 120km (depending on the optical module)
指示燈號	PWR 電源,1~8POE, 9~12 UPIINK
交換內容	56 Gbps 無阻塞
轉發率	41.67Mpps
CPU 頻率	500MHZ DDR :1G
RAM	1M
MAC	8K
包緩衝區	4.1M
FLASH	8M
傳輸方式	存儲轉發
端口特性	10/100/1000M 自動偵測 MDI/MDI-X 全雙工自動偵測
工作溫度	-10°C~55°C
儲存溫度	-40°C~75°C

TW LianLi CO., LTD

聯力有限公司 02-7751-5138 Line@ps666

工作濕度	10%~90%無凝結
儲存濕度	5%~95%無凝結
防雷等級	6KV 8/20us
防護等級	IP30
裸機尺寸	293(L)*190(W)*45(H)mm
輸入電壓	AC 90~265V 50/60HZ
認證	CE-EMC EN55032 ; CE-LVD EN62368 ; FCC Part 15 Class B ; RoHS ;
電壓	110-240V 50/60Hz
選購	機櫃套件

## FIBER MODULE LIST

	Model	Description	Unit
1.25G Fiber Module	850MM-LC	1.25G SFP module, dual LC interface. Multi mode dual fiber, 850nm. Transmission distance is 550meters. Working voltage is 3.3V. Support DDM and hot plugging.	PC
	1310SM-LC	1.25G SFP module, dual LC interface. Single mode dual fiber, 1310nm. Transmission distance is 20km. Working voltage is 3.3V. Support DDM and hot plugging.	PC
	1315A-LC	1.25G SFP module, single LC interface. Single mode single fiber, 1310nm(transmitter), 1550nm(receiving). Transmission distance is 20km. Working voltage is 3.3V. Support DDM and hot plugging.	PC
	1315B-LC	1.25G SFP module, single LC interface. Single mode single fiber, 1550nm(transmitter), 1310nm(receiving). Transmission distance is 20km. Working voltage is 3.3V. Support DDM and hot plugging.	PC
	1315A-SC	1.25G SFP module, single SC interface. Single mode single fiber, 1310nm(transmitter), 1550nm(receiving). Transmission distance is 20km. Working voltage is 3.3V.	PC

		Support DDM and hot plugging.	
	1315B-SC	1.25G SFP module, single SC interface. Single mode single fiber, 1550nm(transmitter), 1310nm(receiving). Transmission distance is 20km. Working voltage is 3.3V. Support DDM and hot plugging.	PC
Ethernet Module	SFP/TP	1.25G Ethernet module , cover SFP to 10/100/1000M RJ45 port	PC